

## Blackmagic Studio Converter



With 10G Ethernet on Blackmagic Studio Converter and Blackmagic Studio Camera 4K Pro G2, you can connect all camera signals using one Ethernet IP link connection. That means the camera feed, return program feed, timecode, reference, tally, talkback and control are all sent down the single cable. That's the same benefits of SMPTE fiber, but the standard 10G copper Ethernet cable is much lower cost. The Blackmagic Studio Converter allows breakout of all the video, audio and talkback connections at the studio end. It also includes a massive power supply that powers the camera down the Ethernet cable, so you don't even need a power source near the camera!

**\$955**

### Connections

#### SDI Video Inputs

2

#### SDI Video Outputs

2

#### SDI Monitor Outputs

1

#### SDI Rates

1.5G, 3G, 6G, 12G.

#### Built in Speaker

Mono

#### Analog Audio Inputs

2 channel analog Program audio in supported via 9-pin connector.

#### Analog Audio Outputs

1 x 6.35 mm headphone jack.

#### SDI Audio Input

Return 1 with 2 channels of Program audio embedded in 1.5G/3G/6G/12G-SDI.

4 talkback channels on 13, 14, 15 and 16.

Return 2 with 2 channels of audio embedded in 1.5G/3G/6G/12G-SDI.

#### SDI Audio Output

2 channels of Program audio embedded in 1.5G/3G/6G/12G-SDI.

4 talkback channels on 13, 14, 15 and 16.

#### Timecode Connections

1 x BNC In, 1 x BNC Out.

#### Reference Connections

1 x BNC In, 1 x BNC Out.

Tri-Sync or Black Burst.

#### Talkback Audio

SDI channels 13 and 14 for Engineering talkback.

SDI channels 15 and 16 for Production talkback.

RJ-45 Talkback connector for analog external talkback systems.

#### Screen

2.2 inch LCD


#### Ethernet

1 x 10Gb/s PoE RJ-45 Camera connector for SMPTE Fibre style workflow over Cat 6A network cable.

1 x 1Gb/s for external control and software updates.

#### Computer Interface

1 x USB-C.

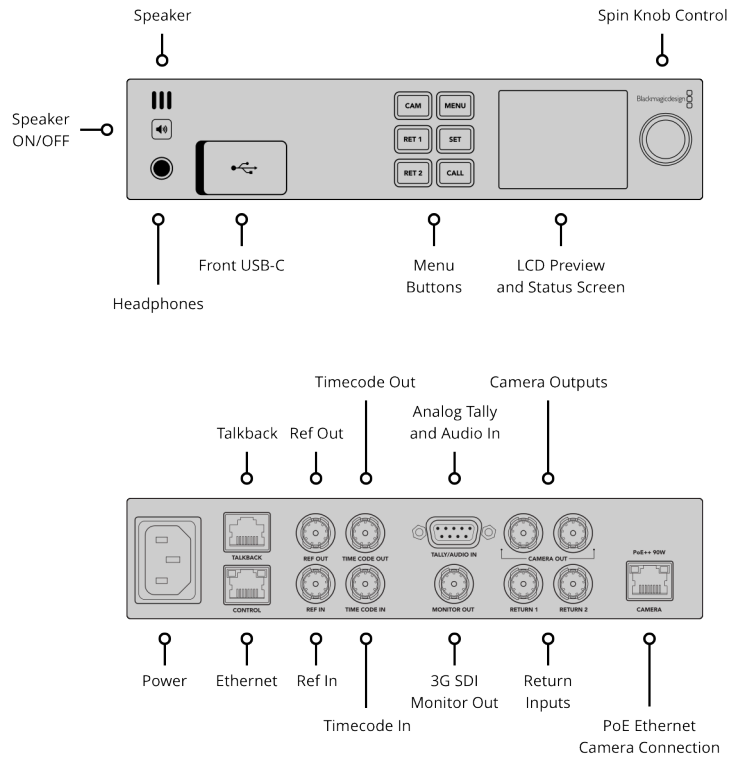

## Standards

### HD Video Standards

1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60, 1080i50, 1080i59.94, 1080i60

### Ultra HD Video Standards

2160p23.98, 2160p24, 2160p25, 2160p29.97, 2160p30, 2160p50, 2160p59.94, 2160p60

### SDI Compliance

SMPTE 292M, SMPTE 424M, SMPTE 425M level A and B, SMPTE 2081-1, SMPTE 2081-10, SMPTE 2082-1 and SMPTE 2082-10.

### Audio Sampling

Television standard sample rate of 48kHz and 24-bit.

### Video Sampling

4:2:2

### Color Precision

10-bit

### Color Space

REC 709, REC 2020.

### Multiple Rate Support

SDI switches between HD, 3G-SDI, 6G-SDI and 12G-SDI.

## Control

### Built in Control Panel

7 buttons with spin knob control and 2.2 inch color display for device control and menu settings.

### External Control

RJ-45 1Gb/s Ethernet.

---

## Software

### Software Included

Camera Utility for firmware update.

---

## Operating Systems



Mac 12.0 Monterey,  
Mac 13.0 Ventura or later.



Windows 10, 64-bit.

---

## Power Requirements

### Power Supply

100 - 240V AC input.

### Power Supply

1 x Internal 100 - 240V AC 50/60Hz.

### Power Usage

40 W max plus camera power usage.

---

## Optional Accessories

Blackmagic Universal Rack Shelf  
Blackmagic Studio Camera 4K Pro

---

## Physical Specifications



---

## Environmental Specifications

### Operating Temperature

0° to 40° C (32° to 104° F)

### Storage Temperature

-20° to 45° C (-4° to 113° F)

### Relative Humidity

0% to 90% non-condensing

---

## What's Included

Blackmagic Studio Converter

---

## Warranty

1 Year Limited Manufacturer's  
Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2023, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller