

ATEM 2 M/E Advanced Panel 20



\$6,159

The 2 M/E model features 2 M/E rows with 20 input buttons and 2 independent system control LCDs for each row. Plus each row can control up to 4 M/Es in larger switchers. Both rows and all input buttons include LCDs for custom labeling. Each row also includes an independent select bus!


Connections

Ethernet

4 x 10/100/1000 BASE-T with loop output for additional control panels or computers.

Software Updates

1 x USB-C for firmware updates.

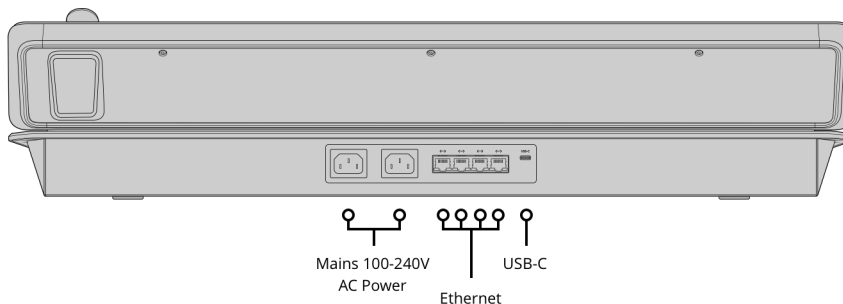

Product Specifics

Number of Mix Effects Rows 2	Crosspoint Label 6 rows 24 character LCD	Preview Transition 2
Direct Cross Points 20	On-Air indicator 8	Transition Rate Displays Via main menu
Shifted Cross Points 40	Power Status Indicators None	LCD Menu Displays 2
Crosspoint Button Type Tri-Color LED	DSK Transition Selectors 2 x Auto, Cut, Tie/Preview	Menu Control 2 x 20 buttons

Dedicated Macro Buttons 2 x 20	Source Select Bus 2	Numeric Keypad 1
Transport Control Buttons 8	Fader Bar 2	
Destination Bus 2	3 Axis Joystick 1	

Software

Software Applications

ATEM Software Control Panel.

Operating Systems



Mac 11.1 Big Sur,
Mac 12.0 Monterey or later.



Windows 10 and 11.

Power Requirements

Input Voltage

2 x Internal 100 - 240V AC.

Redundant Power

Yes

Power Usage

100W

Physical Specifications



Environmental Specifications

Operating Temperature

0° to 40° C (32° to 104° F)

Storage Temperature

-20° to 60° C (-4° to 140° F)

Relative Humidity

Up to 95%

What's Included

ATEM 2 M/E Advanced Panel 20

Warranty

12 Month Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2023, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller