Blackmagicdesign

ATEM 2 M/E Advanced Panel 30

The 2 M/E model features 2 M/E rows with 30 input buttons and 3 independent system control LCDs for each row. Plus each row can control up to 4 M/Es in larger switchers. Both rows and all input buttons include LCDs for custom labeling. Each row also includes an independent select bus!
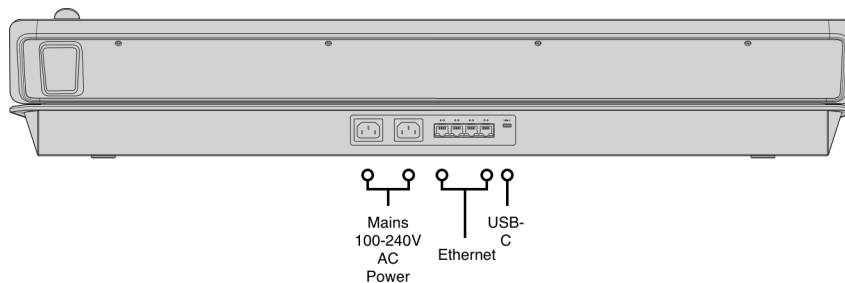
$7,905

Connections

Ethernet
4 x 10/100/1000 BASE-T with loop output for additional control panels or computers.

Software Updates
1 x USB-C for firmware updates.

Product Specifics

Number of Mix Effects Rows
2

Crosspoint Label
6 rows 24 character LCD

Preview Transition
2

Direct Cross Points
30

On-Air indicator
12

Transition Rate Displays
Via main menu

Shifted Cross Points
60

Power Status Indicators
None

LCD Menu Displays
3

Crosspoint Button Type
Tri-Color LED

DSK Transition Selectors
4 x Auto, Cut, Tie/Preview

Menu Control
3 x 20 buttons

Dedicated Macro Buttons	Source Select Bus	Numeric Keypad
2 x 30	2	1

Transport Control Buttons	Fader Bar
8	2

Destination Bus	3 Axis Joystick
2	1

Software

Software Applications
ATEM Software Control Panel.

Operating Systems

Mac 11.1 Big Sur,
Mac 12.0 Monterey or later.

Windows 10 and 11.

Power Requirements

Input Voltage	Redundant Power	Power Usage
2 x Internal 100 - 240V AC.	Yes	120W

Physical Specifications

19 in

36.3 in

0.63 in

5.9 in

LB
33 lb

Environmental Specifications

Operating Temperature
0° to 40° C (32° to 104° F)

Storage Temperature
-20° to 60° C (-4° to 140° F)

Relative Humidity
Up to 95%

What's Included

ATEM 2 M/E Advanced Panel 30
Welcome wallet with QR code for software download

Warranty

12 Month Limited Manufacturer's Warranty.

Blackmagic Design Authorized Reseller